

THE HARMONY OF NATURAL HARMONIES.



VTA CERAMICHE

creativita infinita

POWERED BY:




WOOD PLANK

200 X 1200

By MOULD

BEST MATERIALS

Quality
100% Wood

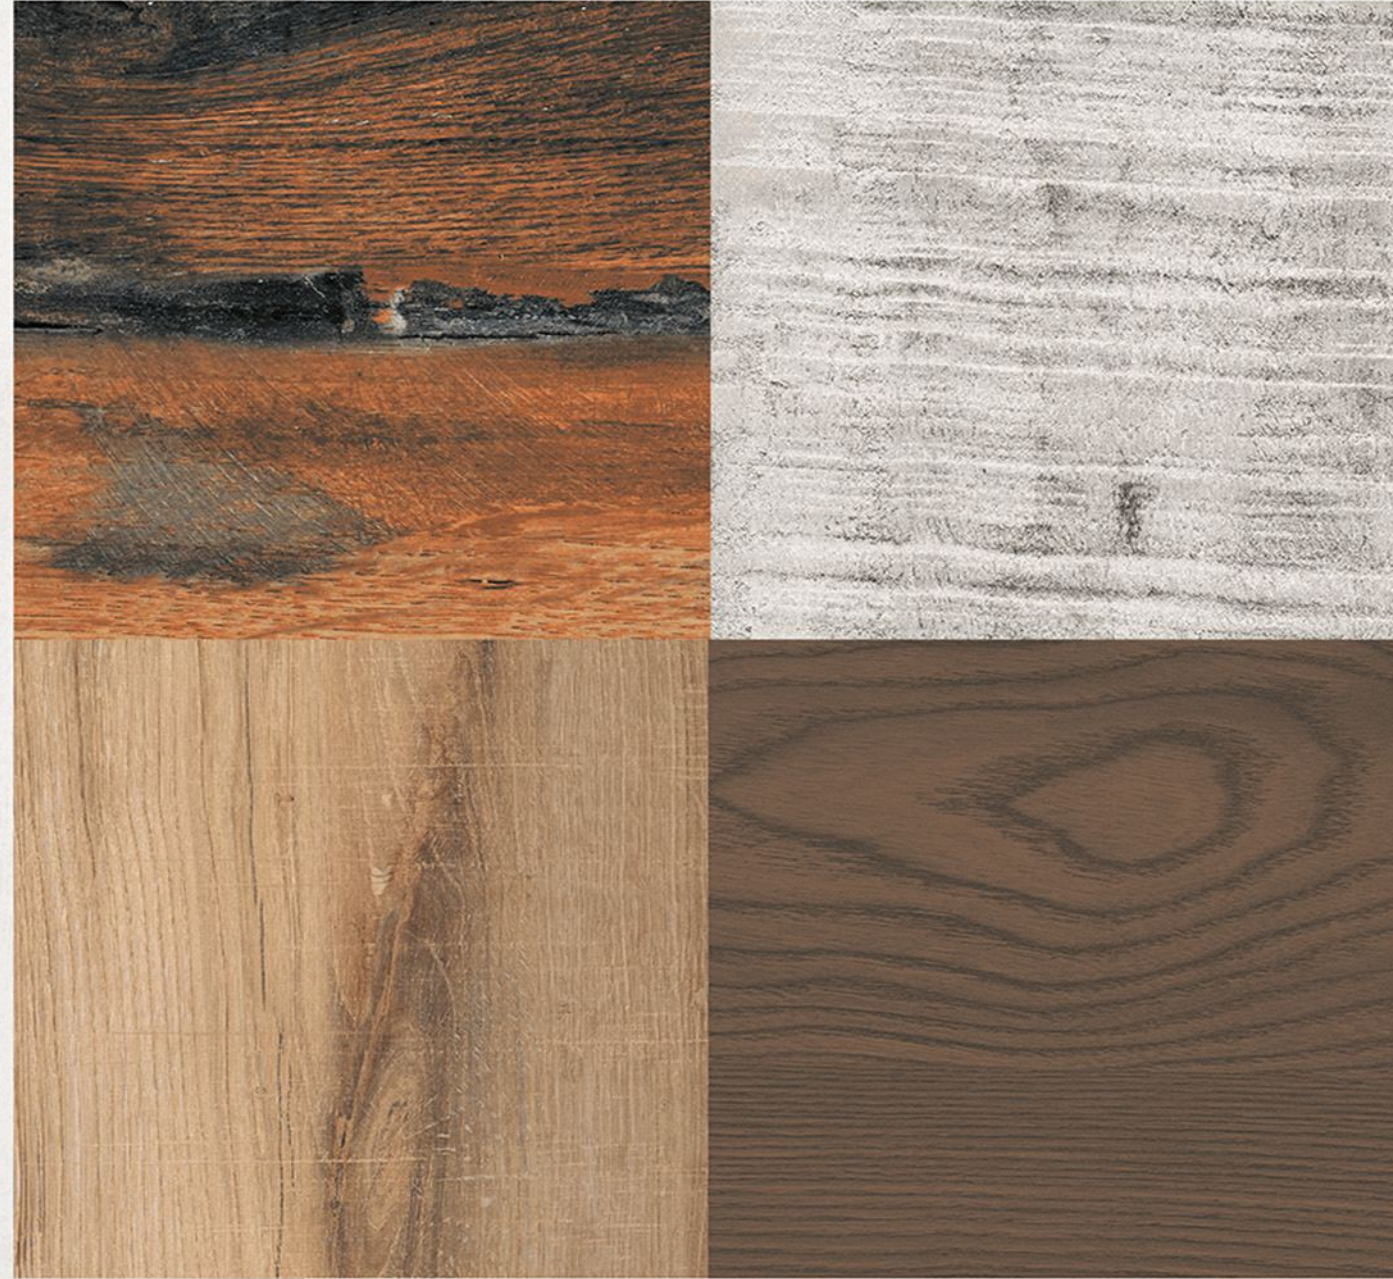

200X
1200 mm

MATT

10 mm
THICKNESS

APRICOT COPER



RANDOM-4



zero
Maintenance



Eco
Friendly



Random
Design



Digital
Print



Applicable On
Wall & Floor



HD
Clarity

200X
1200 mm

MATT

10 mm
THICKNESS

CINNAMON ROVERE



RANDOM-9



zero
Maintenance



Eco
Friendly



Random
Design



Digital
Print



Applicable On
Wall & Floor



HD
Clarity

200X
1200 mm

MATT

10 mm
THICKNESS

CINNAMON WHITE



RANDOM-9



zero
Maintenance



Eco
Friendly



Random
Design



Digital
Print



Applicable On
Wall & Floor



HD
Clarity

200X
1200 mm

MATT

10 mm
THICKNESS

GRAPHITE CHOCO



RANDOM-5



zero
Maintenance



Eco
Friendly



Random
Design



Digital
Print



Applicable On
Wall & Floor



HD
Clarity

200X
1200 mm

MATT

10 mm
THICKNESS

GRAPHITE HONEY



RANDOM-8



zero
Maintenance



Eco
Friendly



Random
Design



Digital
Print



Applicable On
Wall & Floor



HD
Clarity

200X
1200 mm

MATT

10 mm
THICKNESS

LATINA WHITE



RANDOM-9



zero
Maintenance



Eco
Friendly



Random
Design



Digital
Print



Applicable On
Wall & Floor



HD
Clarity

200X
1200 mm

MATT

10 mm
THICKNESS

LAVISH BROWN



RANDOM-9



zero
Maintenance



Eco
Friendly



Random
Design



Digital
Print



Applicable On
Wall & Floor



HD
Clarity

200X
1200 mm

MATT

10 mm
THICKNESS

LINUM CAFE



RANDOM-9



zero
Maintenance



Eco
Friendly



Random
Design



Digital
Print



Applicable On
Wall & Floor



HD
Clarity

200X
1200 mm

MATT

10 mm
THICKNESS

ROYAL ALMOND



RANDOM-11



zero
Maintenance



Eco
Friendly



Random
Design



Digital
Print



Applicable On
Wall & Floor



HD
Clarity

200X
1200 mm

MATT

10 mm
THICKNESS

ROYAL BONE



RANDOM-11



zero
Maintenance



Eco
Friendly



Random
Design



Digital
Print



Applicable On
Wall & Floor



HD
Clarity

Sr.No.	Property	International Std. ISO 13006/EN 176 Group	Our Value	Method of Testing
1	Deviation In Length	+/-0.6%	+/-0.3%	ISO 10545 Pt 2
2	Deviation In Thickness	+/-5%	+/-3%	ISO 10545 Pt 2
3	Straightness of sides	+/-0.5%	+/-0.1%	ISO 10545 Pt 2
4	Rectangularity	+/-0.6%	+/-0.2%	ISO 10545 Pt 2
5	**Surface flatness	+/-0.5%	+/-0.2%	ISO 10545 Pt 2
6	Water absorption	2-4%	2-3%	ISO 10545 Pt 3
7	*Mohs hardness	>6	>6	EN 101
8	Flexural Strength	>35N/mm ²	³ 46N/mm ²	ISO 10545 Pt 4
9	Abrasion resistance	<175mm ²	<144mm ²	ISO 10545 Pt 6
10	**Skid resistance (Friction coefficient)	>0.4	>0.4	ISO 10545 Pt 17
11	Breaking strength	1113 N	2800 N	ISO 10545 Pt 4
12	Frost resistance	Frost proof	Frost proof	ISO 10545 Pt 12
13	Chemical resistance	No Damage	No Damage	ISO 10545 Pt 13
14	Thermal shock resistance	No Damage	No Damage	ISO 10545 Pt 9
15	Colour resistance	No Damage	No Damage	DIN 51094
16	Stain resistance	Resistance	Resistance	ISO 10545-14
17	Moisture expansion	Nil	Nil	ISO 10545-10
18	Resistance to Surface Abrasion (of tiles intended for use on Floors)***	Abrasion class shall be specified by the manufacturer	PEI Group V	ISO 10545-7 IS : 13630-11

PACKING DETAILS

Sr.No.	Size	No. of Tiles Per Box	Coverage Area in Sqm.	Approx. Weight / Box
1	200x1200 mm	5 Pc	1.2 Sqm.	25.5 Kg.

APPLICATIONS



POWERED BY:



+91 75671 00666

export@vtaoverseas.com

www.vtaoverseas.com