



POWERED BY:



1200X1200MM
CARVING COLLECTION

L
u
x
u
r
i
a
n
c
e



Ultimate
Collection

As accents, the idea is to break the monotony of the solid colored walls with upholstery, furniture and decoration indigenous to this area.

Style Of Fabulous finesse

Revolutionize the luxury of your life with a touch of royalty and elegance from the classic series, which has been inspired by the beauty of the contemporary era. Explore new traditions and add a new colour to your life in this modern world.

The nobility of marble and the refinement of coloured veining find their perfect balance in Purity of marble. A project range complete with porcelain stoneware and white body floor tiles that uses ceramics to interpret the elegance and beauty of ten precious marbles offering today's architecture solutions for project design

Technical Features



Uv
Resistance



Scratch
Resistance



Water
Resistance




Chemical
Resistance



Light
Weight



Flexible
Body



Impactful Glance


A strong character, a style of great rigor and balance: the Gray Quartzite of Forth turns out to be the ideal solution either for those who want surfaces classic, both for those who prefer a more modern mood. The refinement of the texture lends itself to offering multiple expressions of furniture, guaranteeing the best technical performance.



**ANTRACITA
BEIGE**

1200x1200mm

Carving
Surface

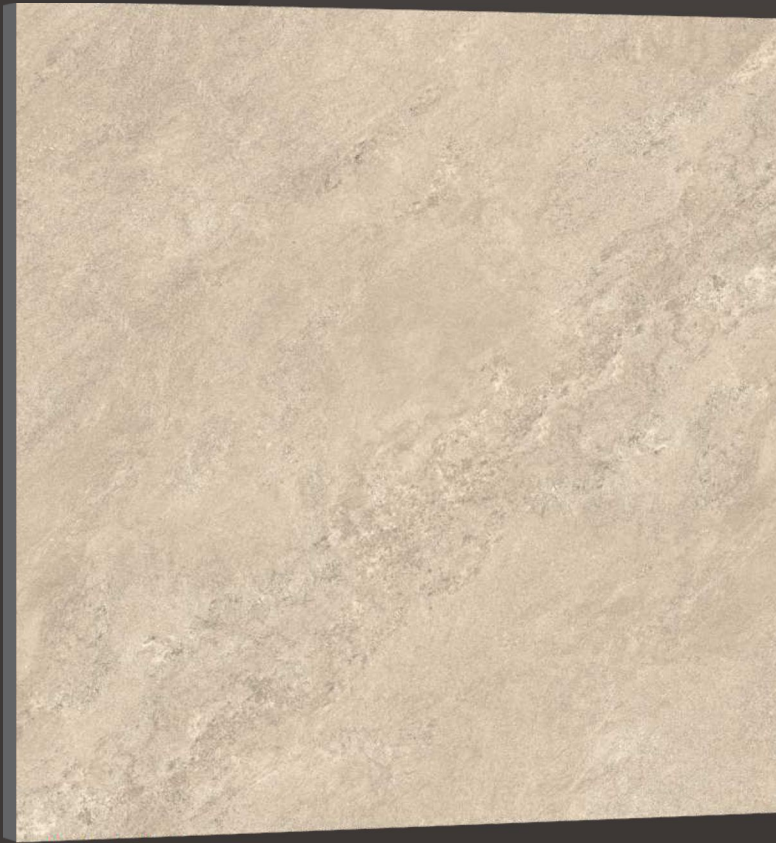






**ANTRACITA
BIANCO**

3 Randoms

1200x1200mm

Carving
Surface

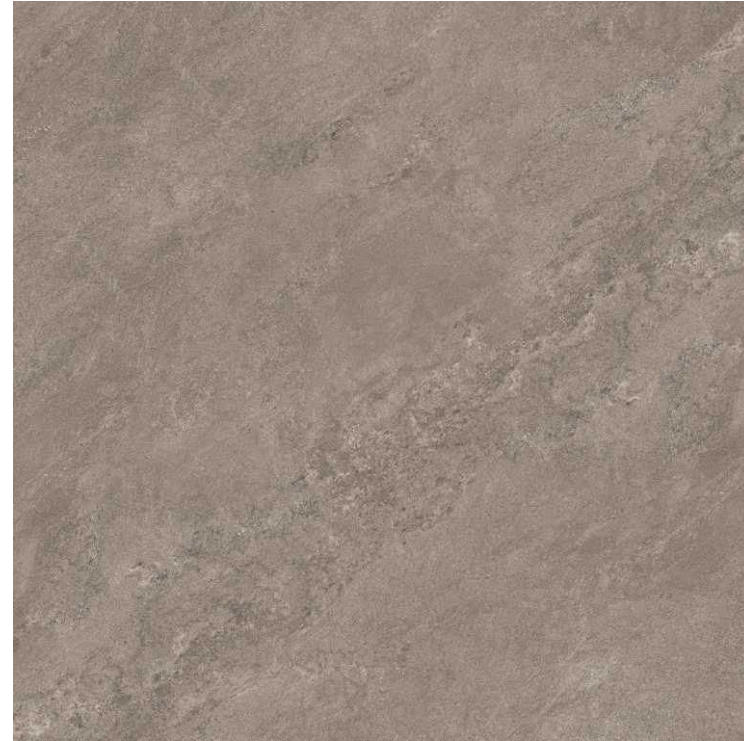


**ANTRACITA
BROWN**

3 Randoms

1200x1200mm

Carving
Surface



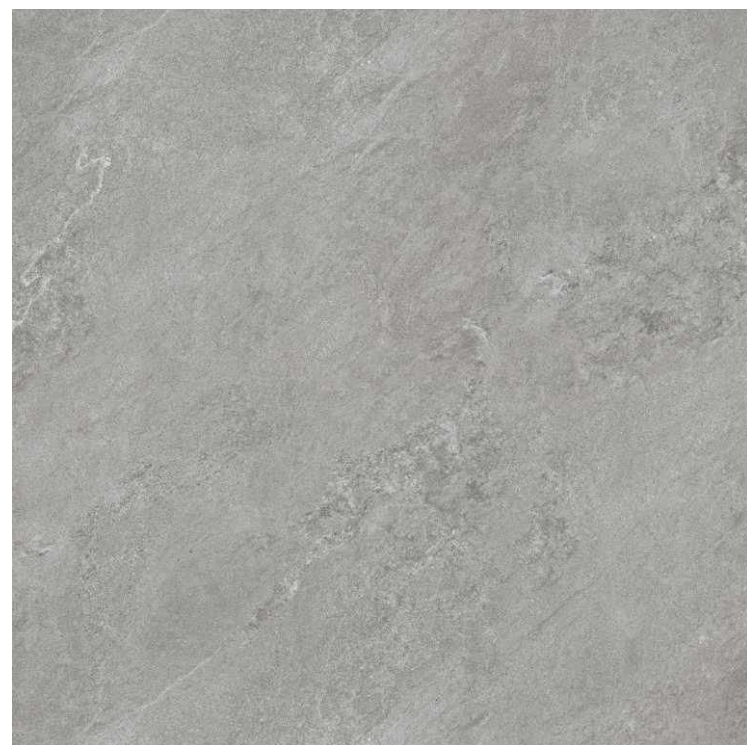

**ANTRACITA
GREY**

3 Randoms

1200x1200mm

Carving
Surface





**ARREZO
BIANCO**

1200x1200mm

Carving
Surface



3
Randoms





Carving
Collection



ATHENS GREY

1200x1200mm

Carving
Surface



3
Randoms



**BOSCO
GREY**

1200x1200mm

Carving
Surface





**BOTTOCHINO
CLASSICO**

1200x1200mm


Carving
Surface



3
Randoms





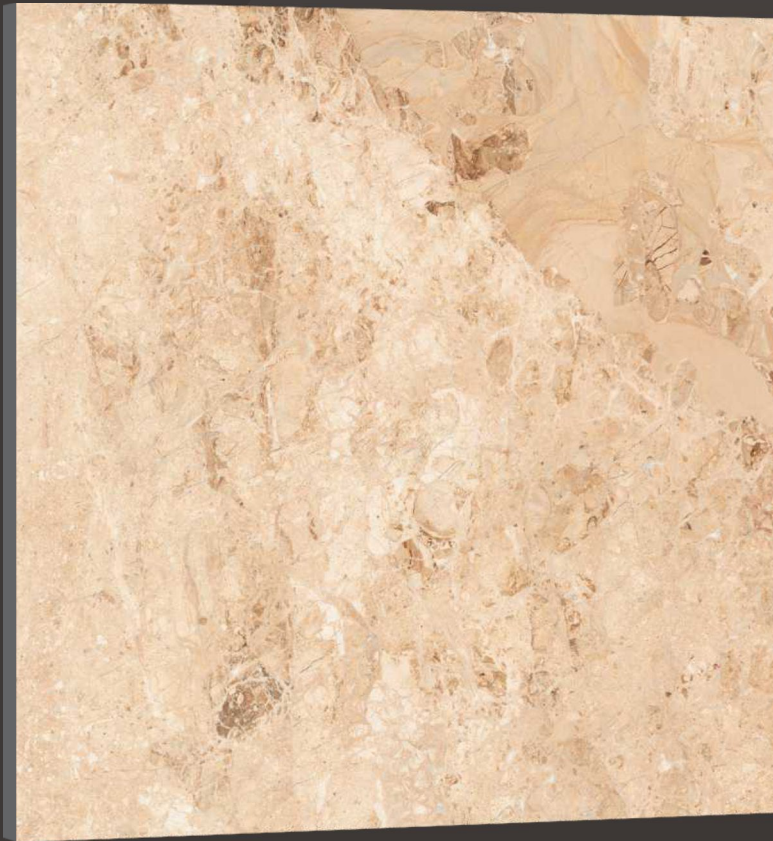

**BRECCIA
AURORA**

1200x1200mm

Carving
Surface








**CASTLE
GREY**

1200x1200mm

Carving
Surface

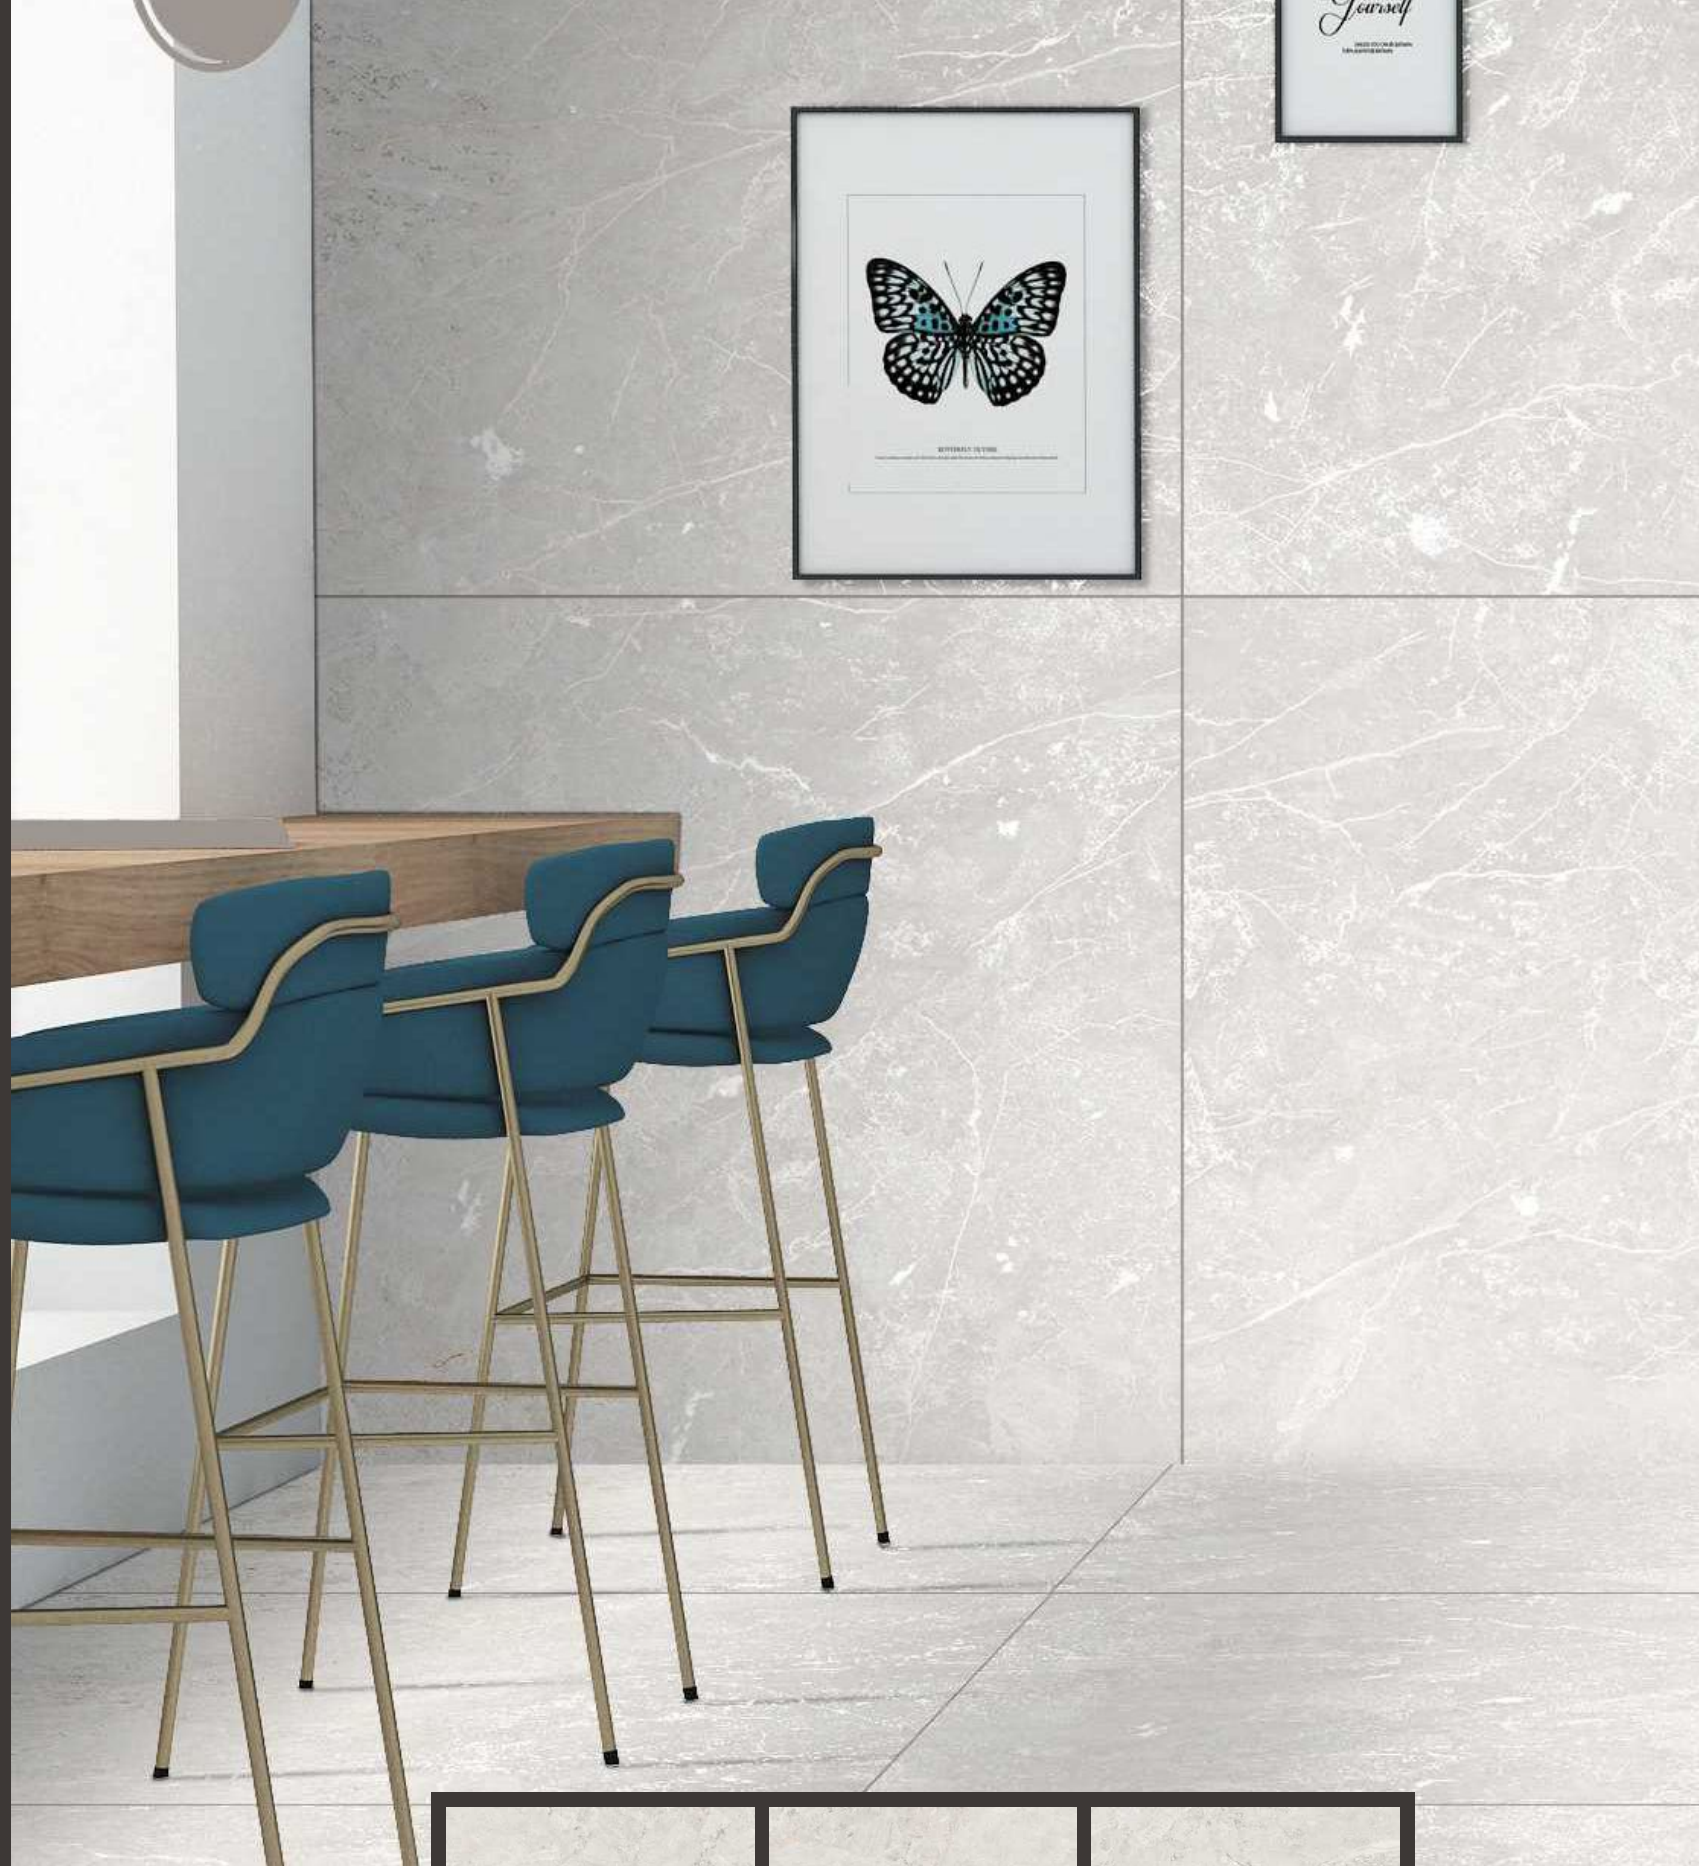

3
Randoms





**GRAINY
GREY**

1200x1200mm

Carving
Surface







**GRAINY
LIGHT**

3 Randoms

1200x1200mm


Carving
Surface



**FAZE
GREY**

1200x1200mm

Carving
Surface

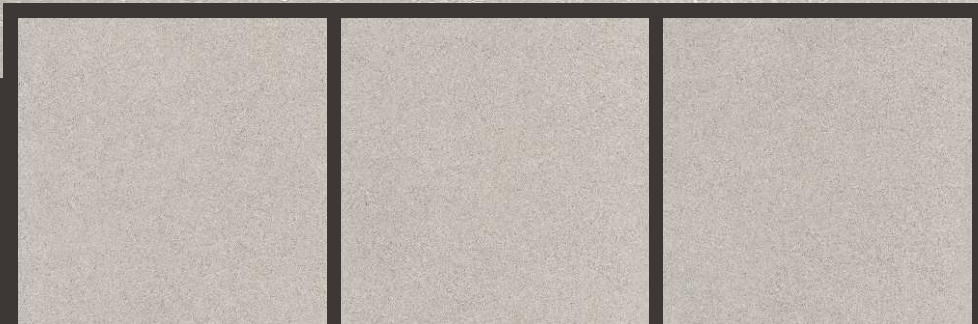





**LIMER
GREY**

1200x1200mm


Carving
Surface



2
Randoms






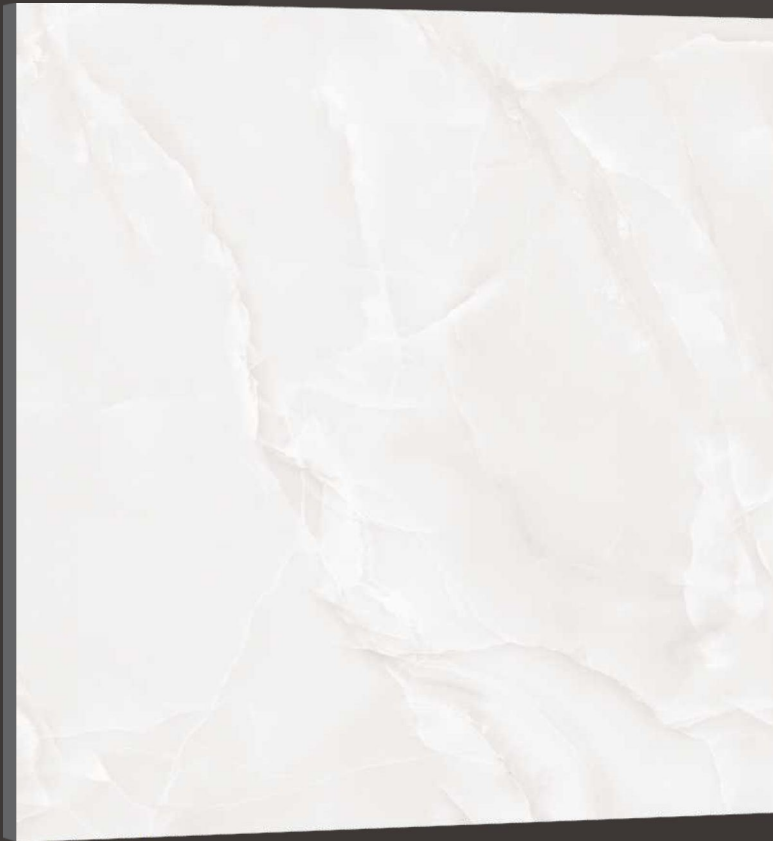

**ONYX
GREY**

1200x1200mm

Carving
Surface

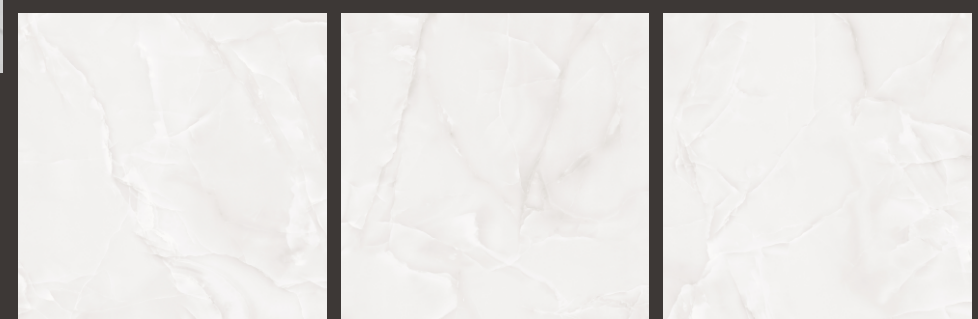

3

Randoms





**PERLATO
ROYAL**

1200x1200mm

Carving
Surface







RIZZONI

1200x1200mm

Carving
Surface







ROSSALIA

1200x1200mm


Carving
Surface



3
Randoms





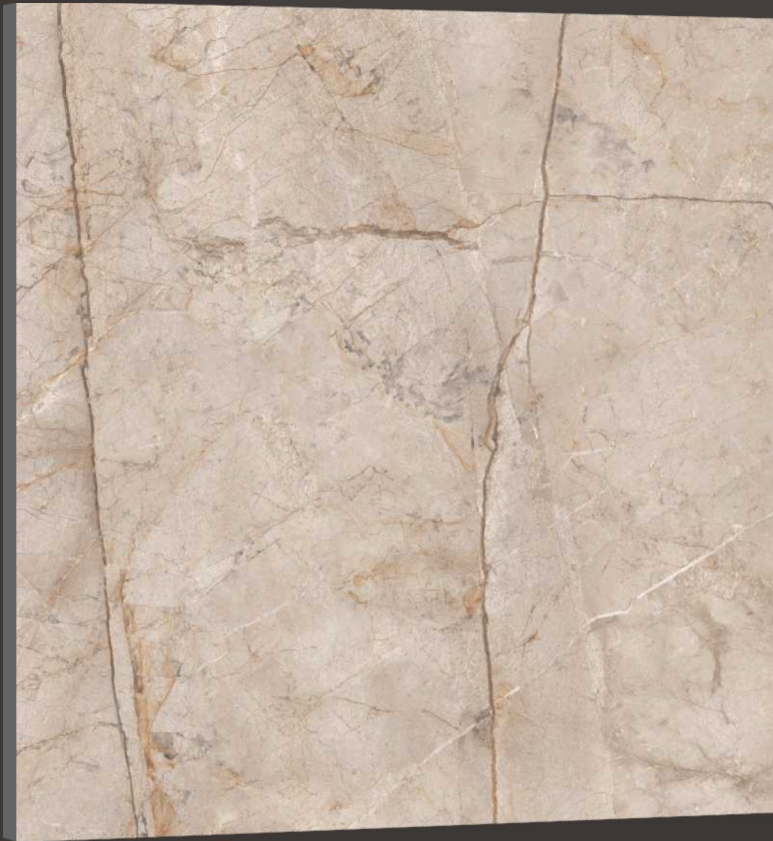

**SILVER
RIVER**

1200x1200mm

Carving
Surface



3
Randoms





**SOFITA
BEIGE**

1200x1200mm

Carving
Surface






**VENICE
BIANCO**

1200x1200mm

Carving
Surface








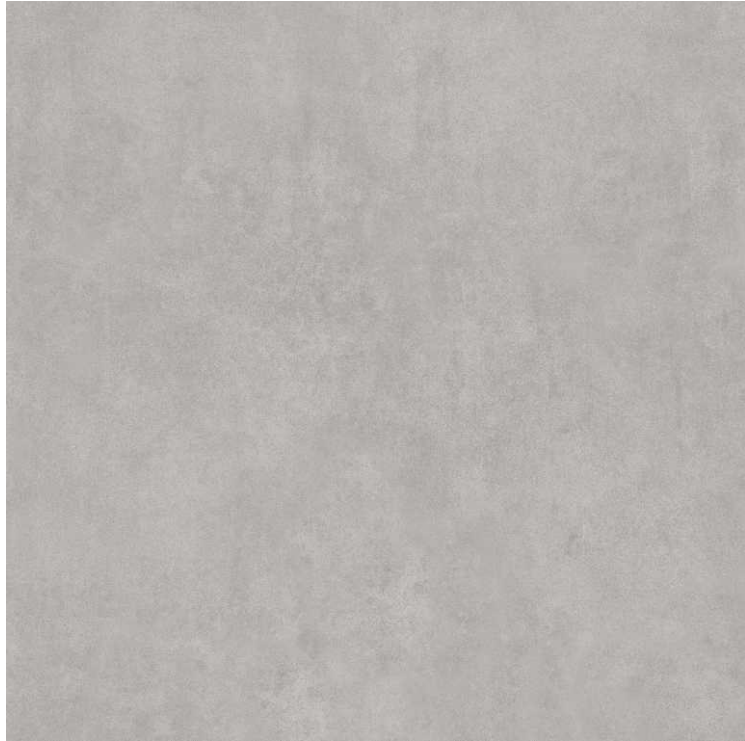


**VENICE
GREY**

3 Randoms

1200x1200mm

Carving
Surface

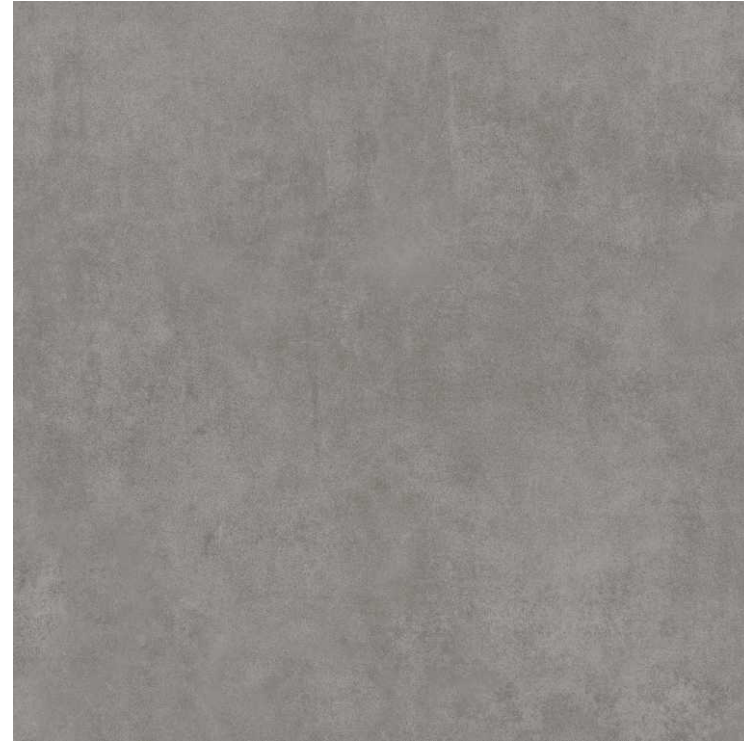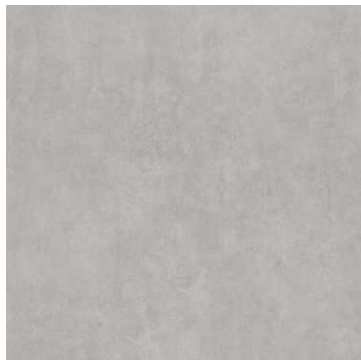
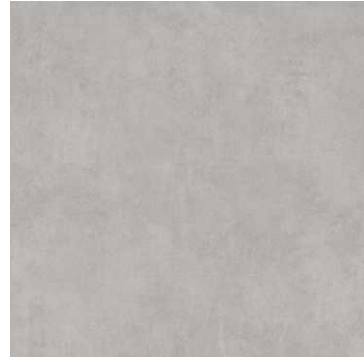
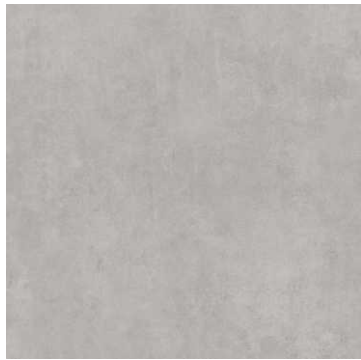



**VENICE
NERO**

3 Randoms

1200x1200mm

Carving
Surface

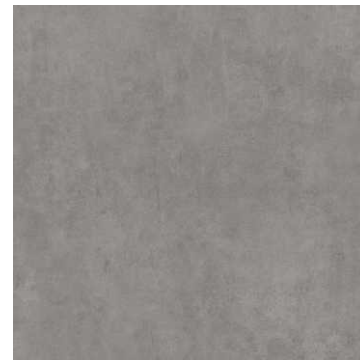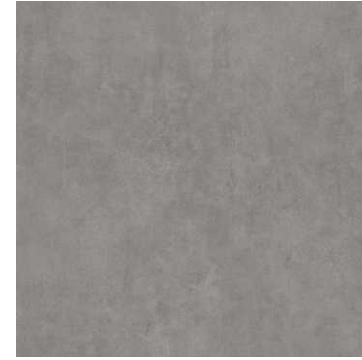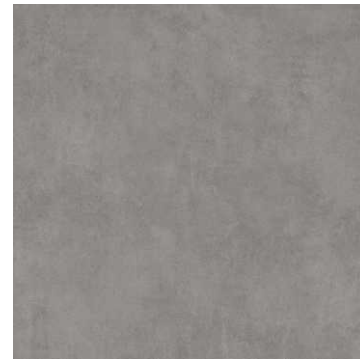



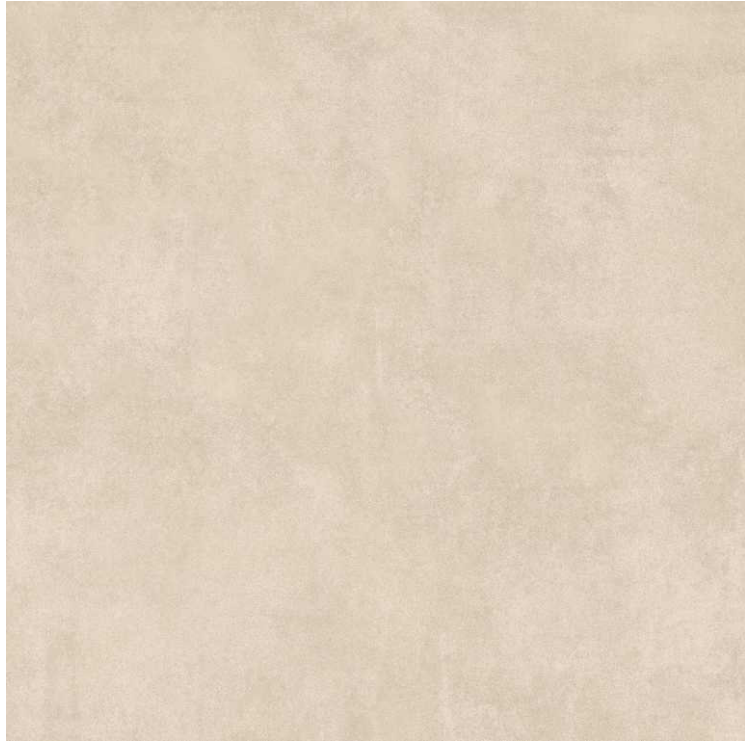


**VENICE
SAND**

3 Randoms

1200x1200mm

Carving
Surface

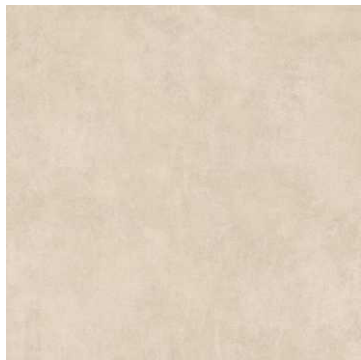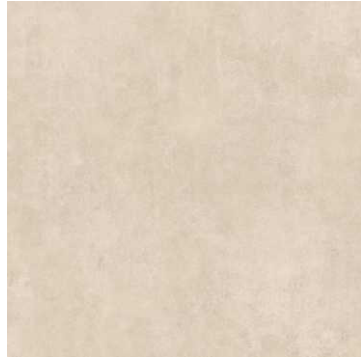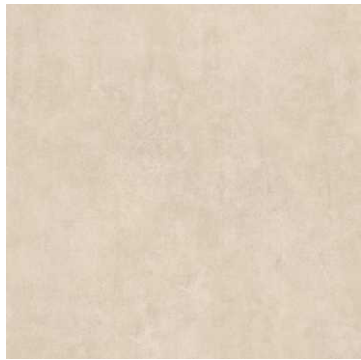



VICTORIAN BROWN

1200x1200mm

Carving
Surface



3
Randoms





TECHNICAL SPECIFICATIONS

CHARACTERISTICS	STANDARD AS PER ISO-13006/EN14411 GROUP B/A	MEAN VALUE OF OUR PGVT	MEAN VALUE OF OUR GVT	TEST METHOD
REGULATORY PROPERTIES				
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Rectangularity	±0.6 %	±0.1 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	No change	ISO-10545-16
Glossiness	As per mfg.	Min. 90%	Min. 4%	GLOSSOMETER
SURFACE MECHANICAL PROPERTIES				
Water absorption	< 0.50 %	< 0.05 %	< 0.05 %	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES				
Modulus of rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES				
Surface abrasion resistance	As per mfg	Min. Class-3	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	Min. 5	EN 101
THERMO HYDROMETRIC PROPERTIES				
Frost resistance	No damage	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0x10 ⁻⁶	Max. 6.5x10 ⁻⁶	Max. 6.5x10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES				
Chemical resistance	No damage	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES				
Slip resistance	As per mfg.	> 0.40	> 0.40	ISO-10545-17
Fire resistance	As per mfg.	Fireproof	Fireproof	N. A.
Lead & Cadmium given off by glazed tiles	As per mfg.	Doesn't yield Pb & Cd	Doesn't yield Pb & Cd	ISO-10545-15

PACKING DETAILS

Sr. No.	Size	Thickness (approx*)	Pieces / Box	Area / Box (approx*)	Packing
1	120x120cm	9 to 9.5 mm	2 pcs.	2.88 sq. mtr. / 31.00 sq. ft.	Box



POWERED BY:



+91 75671 00666

export@vtaoverseas.com

www.vtaoverseas.com