

600
X1200_{MM}

Carving

SERIES



600X1200MM



italian
COLLECTION




Glossy finish porcelain tiles exude an unparalleled sophistication, effortlessly transforming any space into a realm of contemporary elegance. Their sleek surface, delicately polished to perfection, reflects light in a mesmerizing dance, amplifying the luminosity of the room and infusing it with an air of luxury. Crafted with meticulous attention to detail, these tiles boast a flawless sheen that not only enhances their visual appeal but also promises durability and resilience. Whether adorning the floors of a chic boutique or gracing the walls of a modern penthouse, glossy finish porcelain tiles stand as a testament to timeless beauty and refined taste.

Advantages



WALL TILE



FLOOR TILE



RESIDENTIAL AREA



COMMERCIAL AREA



FIRE RESISTANCE



WATER RESISTANCE



EASY INSTALLATION



EASY MAINTENANCE



GVT SURFACE



HYGIENIC SURFACE



HIGH DURABILITY



ANTI SLIP SURFACE




CR-01

Random-1




CR-02

Random-1

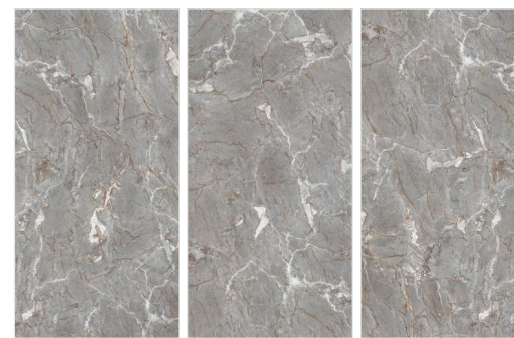

CR-03

Random-4

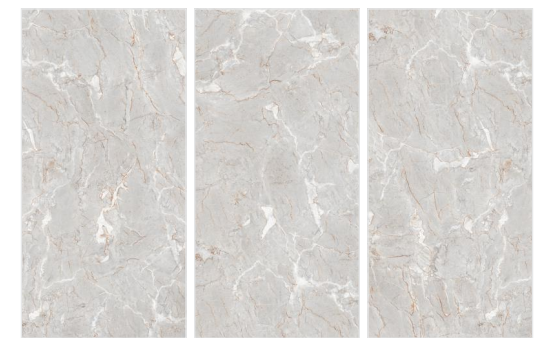

CR-04

Random-4



600x1200mm




CR-05

Random-4



CR-06

Random-3

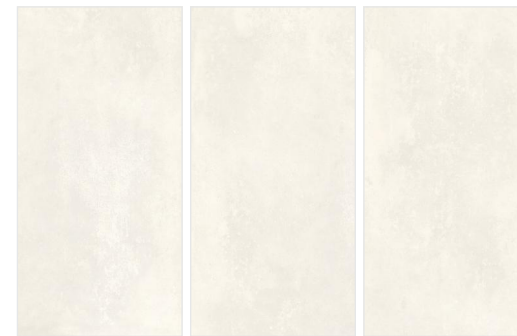

CR-07

Random-4



CR-08

Random-4



600x1200mm



CR-09

Random-3




CR-10

Random-4



CR-11



Random-3

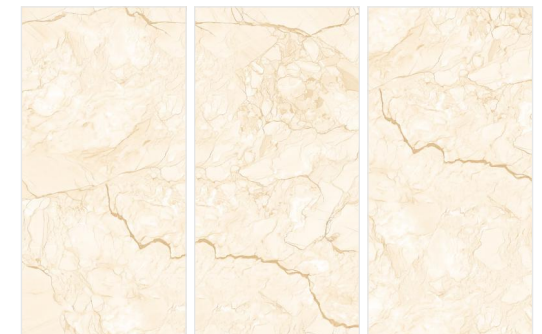

CR-12

Random-3



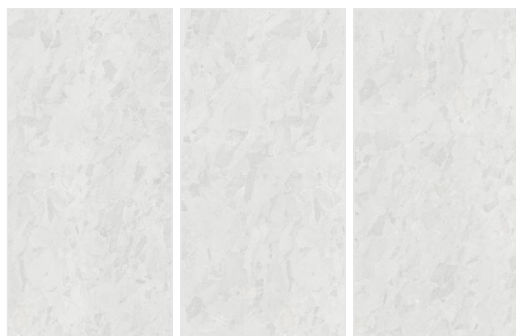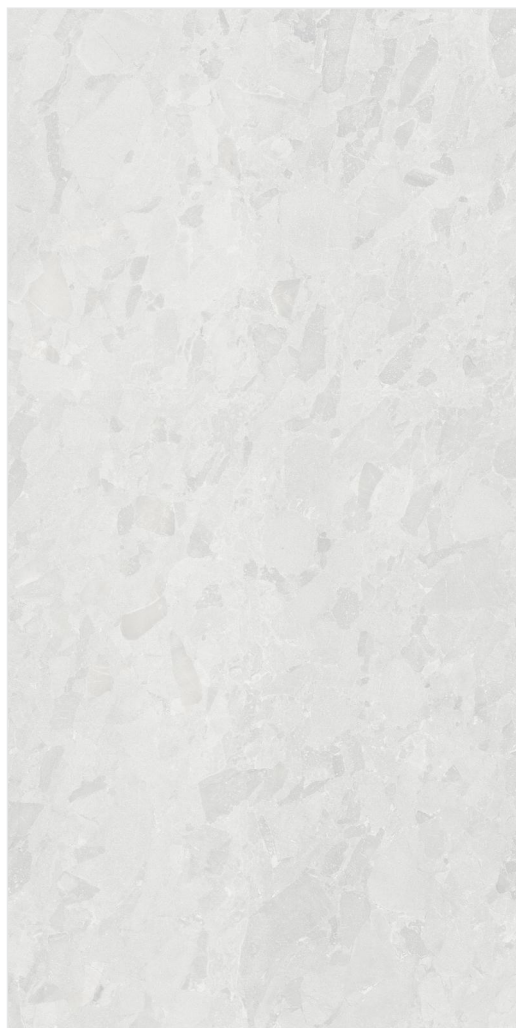

CR-13

Random-4



CR-14

Random-4



CR-15

Random-4





CR-16

Random-3





600x1200mm

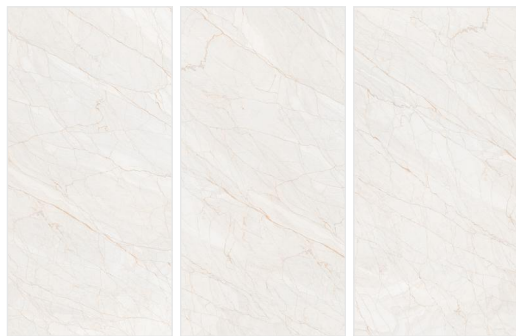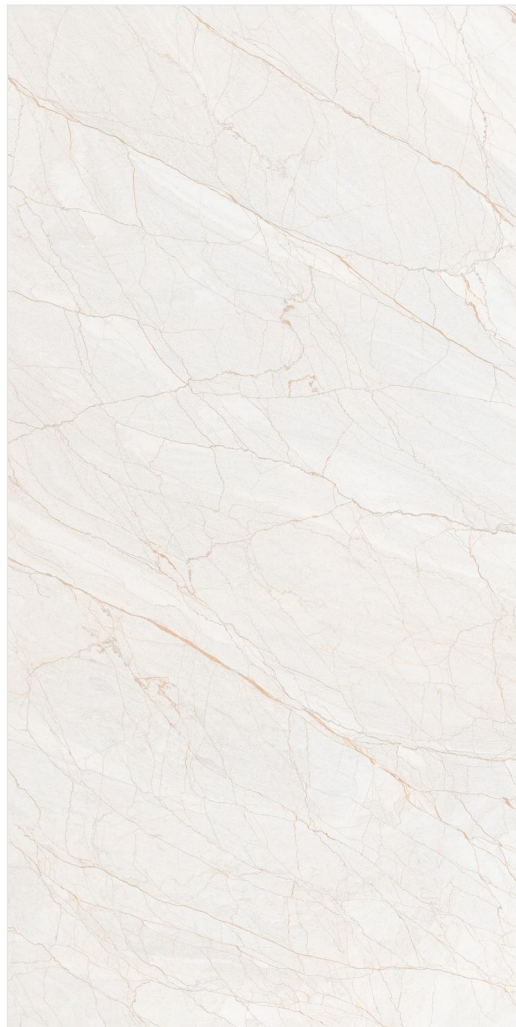


CR-17

Random-3

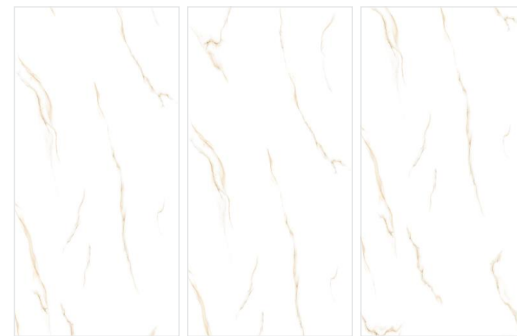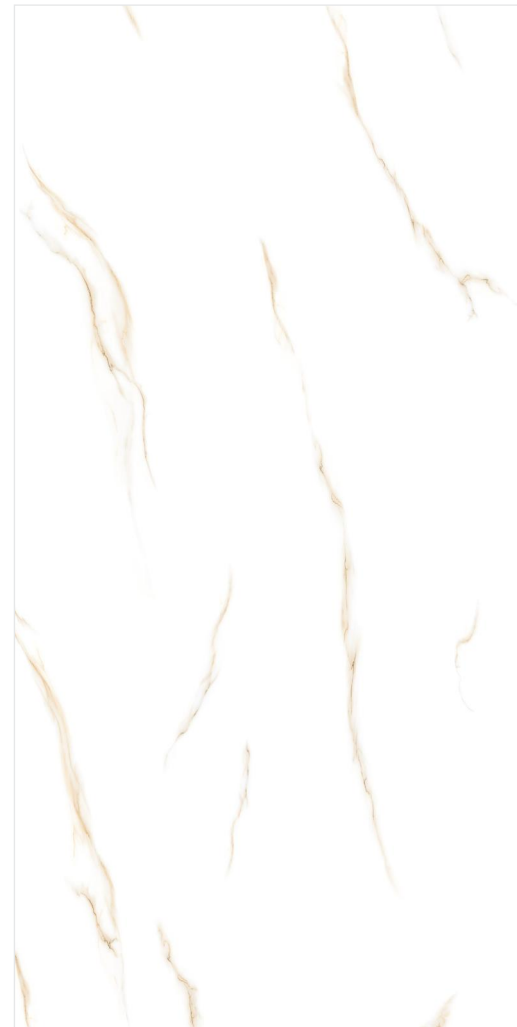


CR-18

Random-3

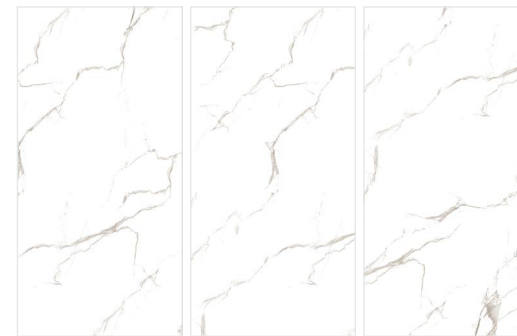

CR-19



Random-3

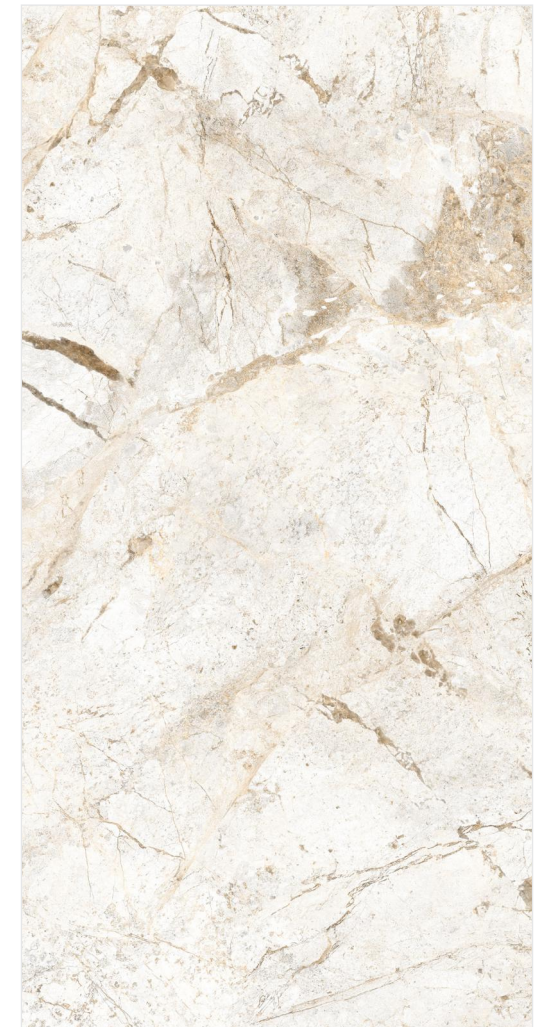

CR-20


Random-4



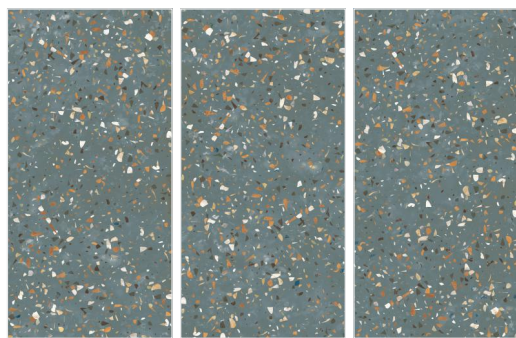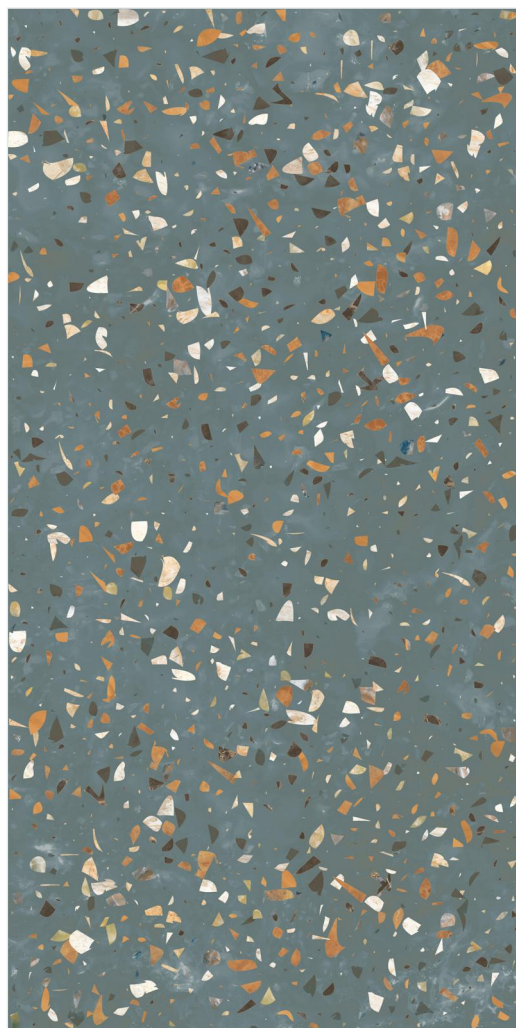

CR-21

Random-4

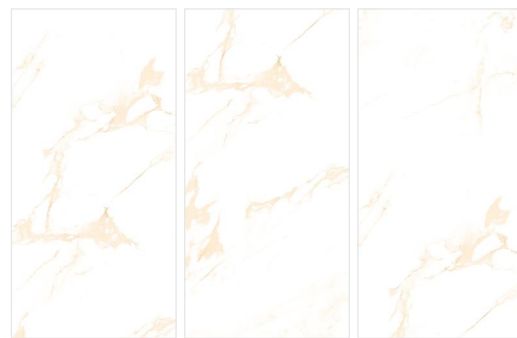

CR-22

Random-3



600x1200mm





CR-23

Random-4




CR-24

Random-4

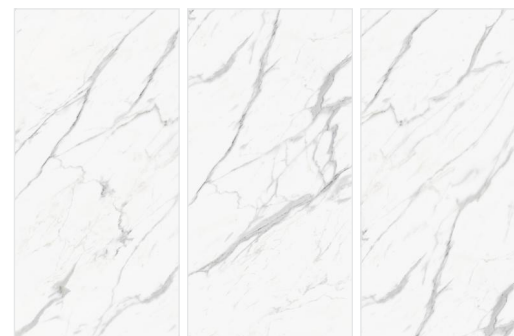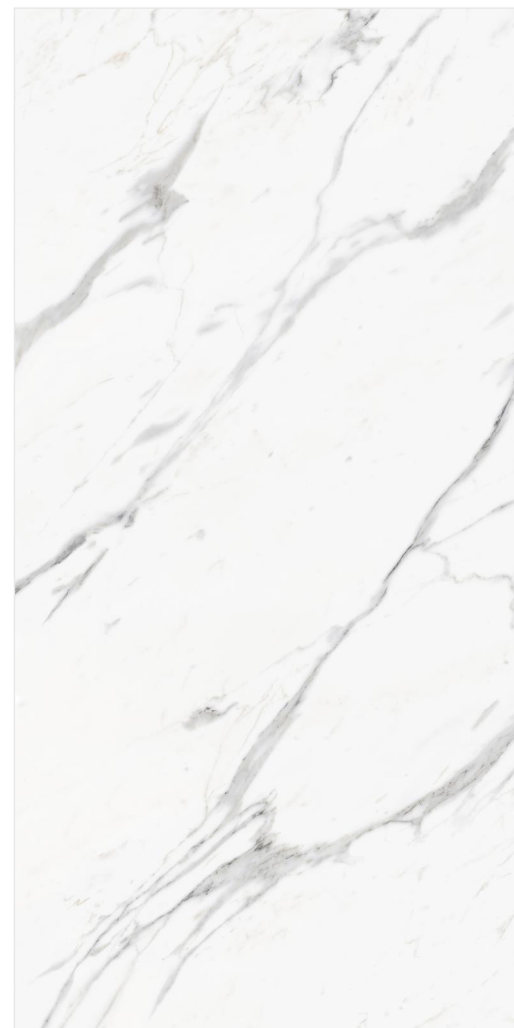

CR-25

Random-4

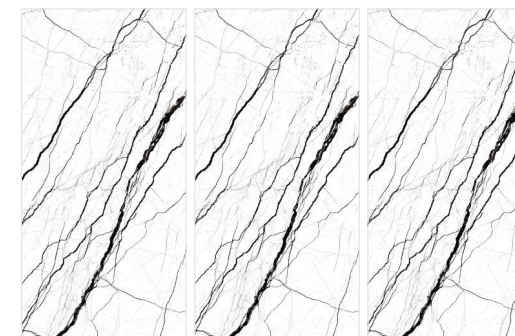


CR-26

Random-1




600x1200mm

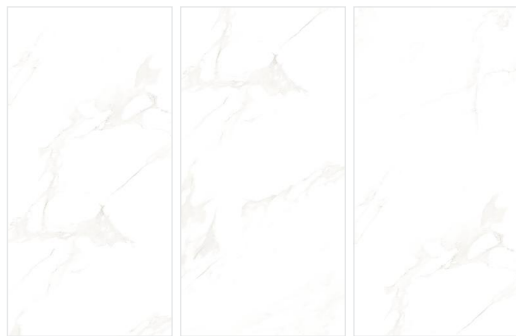



CR-27

Random-3

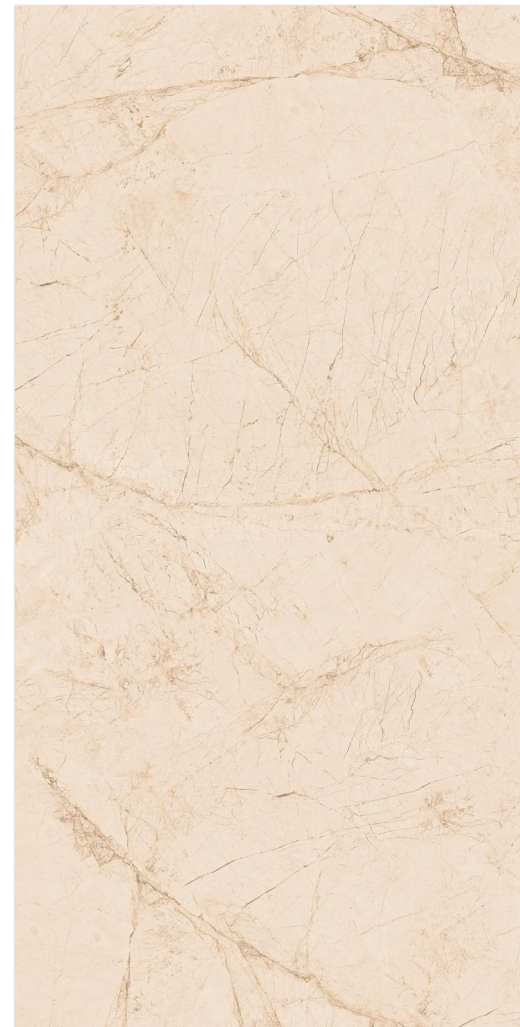

CR-28

Random-4

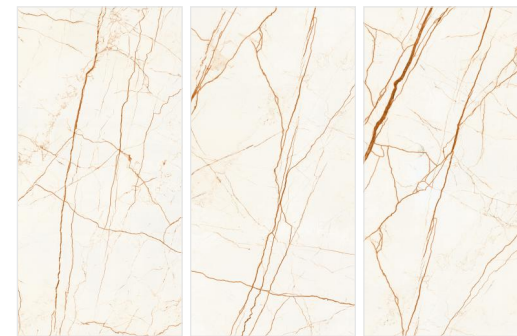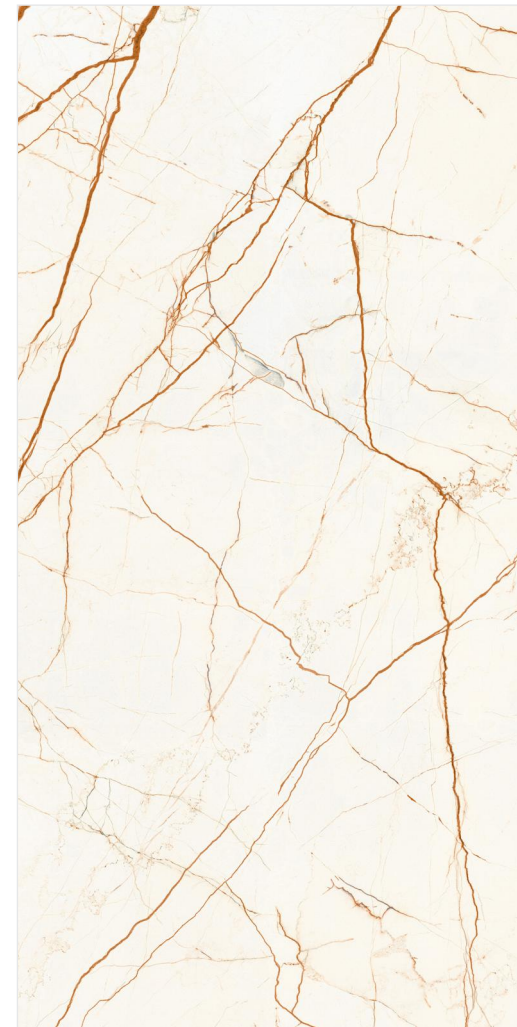

CR-29

Random-4



CR-30

Random-4






CR-31

Random-4



CR-32

Random-4

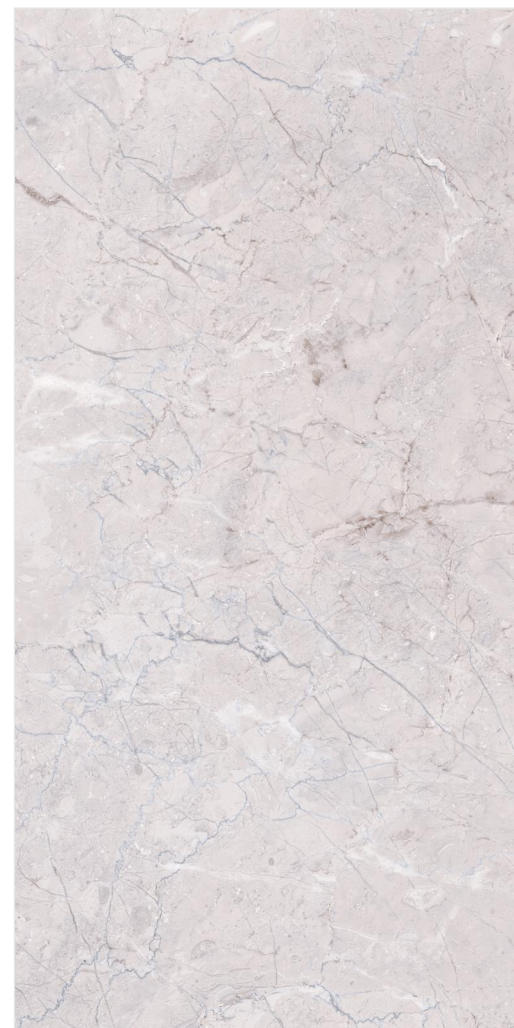

CR-33

Random-4



CR-34

Random-4



600x1200mm



CR-35

Random-4




CR-36

Random-4



CR-37

Random-4

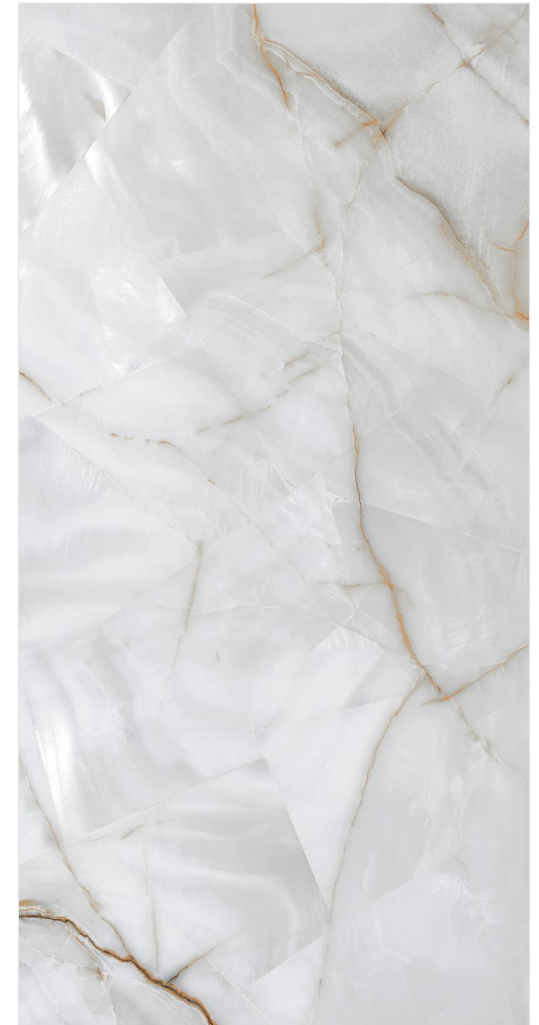

CR-38

Random-3



600x1200mm




CR-39

Random-4




CR-40

Random-4

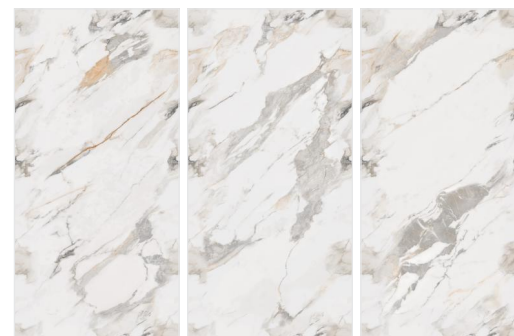

CR-41

Random-4

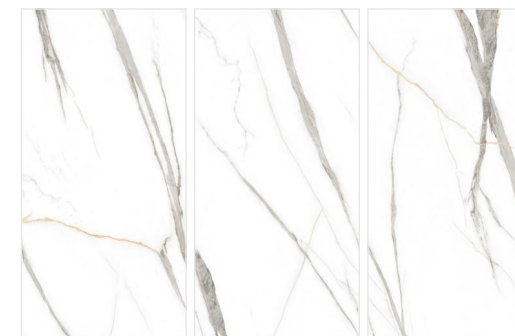

CR-42

Random-4




600x1200mm



CR-43

Random-2

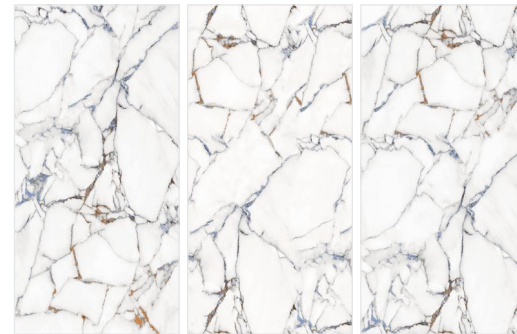

CR-44

Random-3



600x1200mm




CR-45

Random-3




CR-46

Random-3

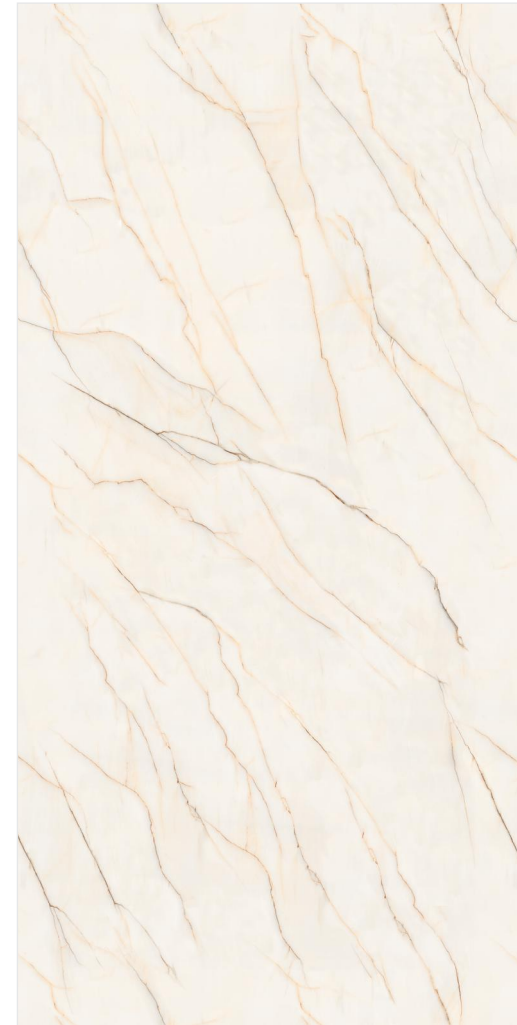

CR-47

Random-3

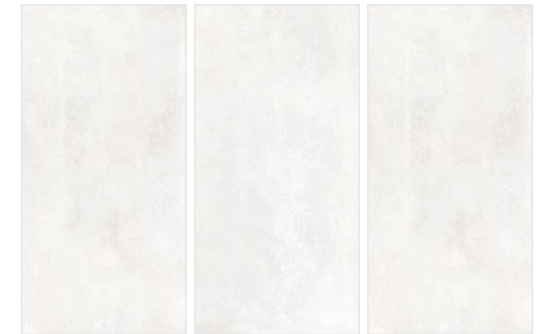


CR-48

Random-2



600x1200mm

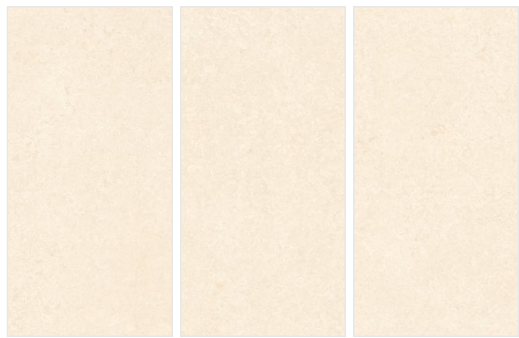

CR-50

Random-4



CR-51

Random-1



CR-52

Random-4




CR-53

Random-4



600x1200mm

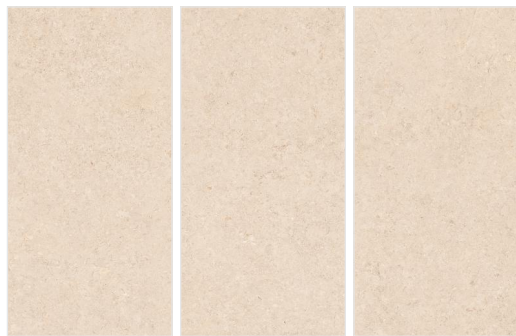

CR-54

Random-4




CR-55

Random-4



CR-56

Random-2

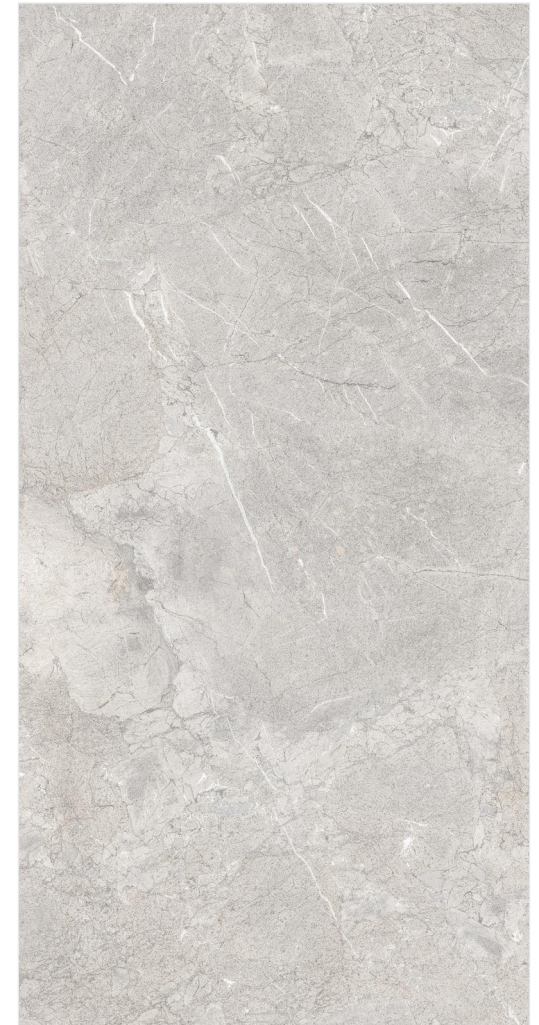


CR-57

Random-2




600x1200mm

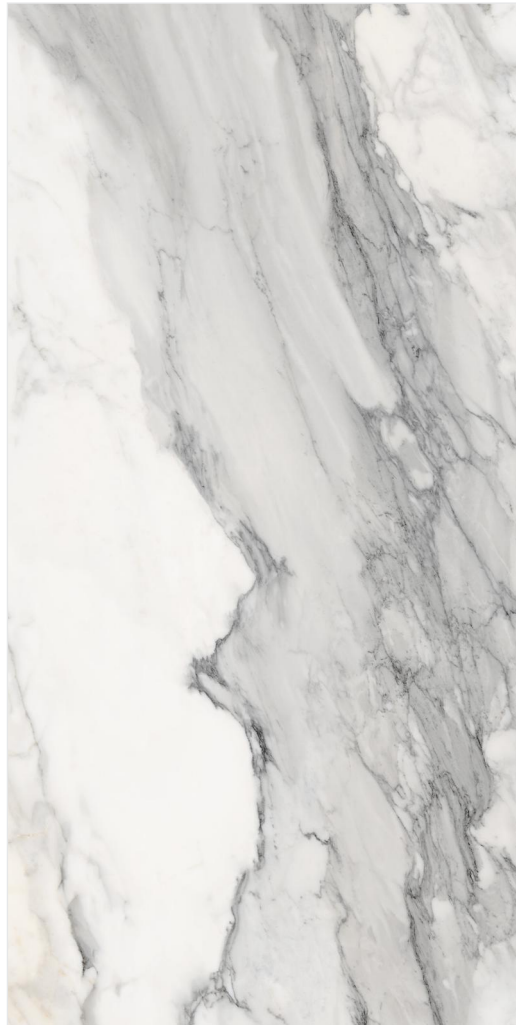

CR-58

Random-3

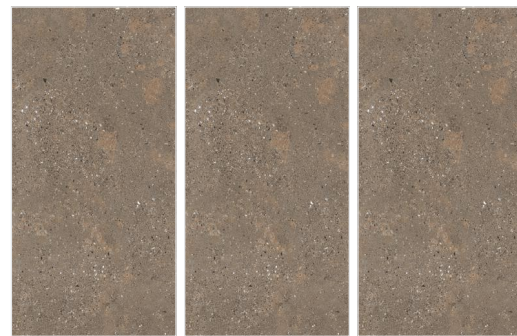



CR-59

Random-1



CR-60

Random-4

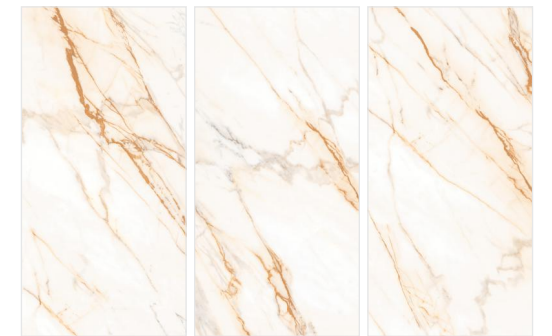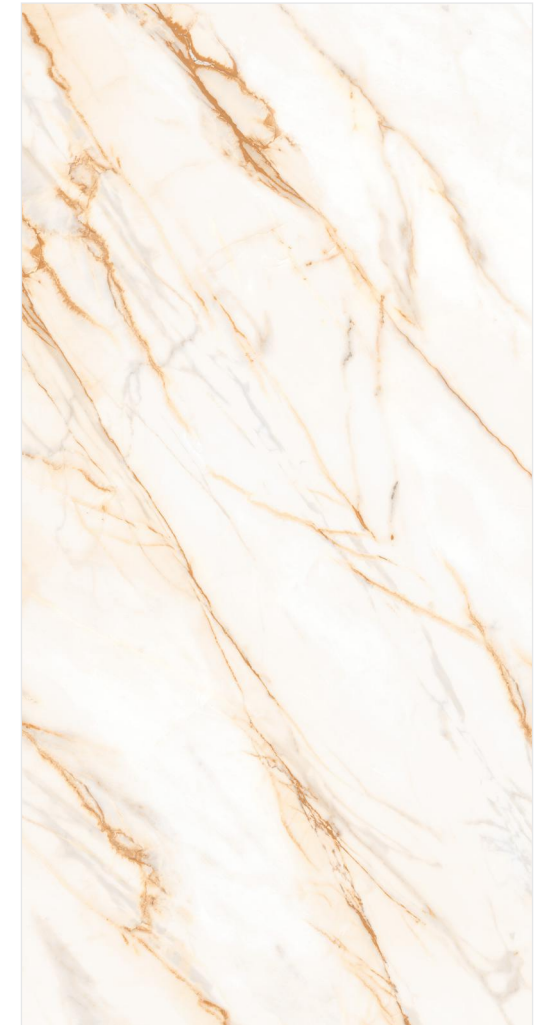


CR-61

Random-4



600x1200mm

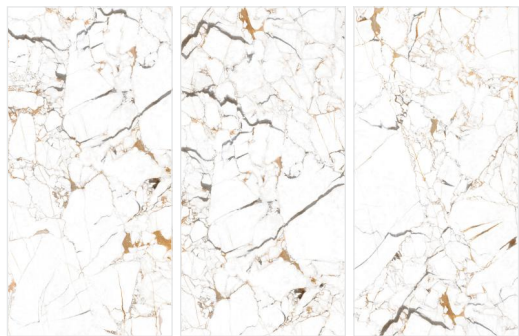



CR-62

Random-4




CR-63

Random-4

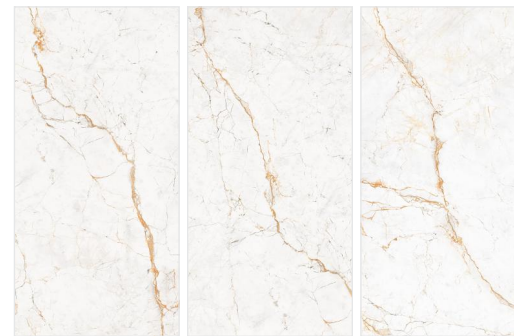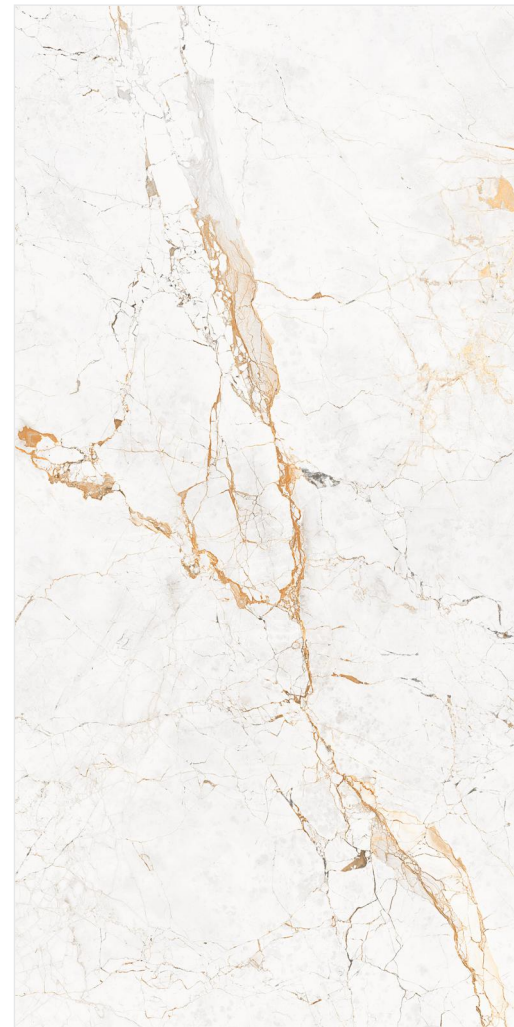

CR-64

Random-4

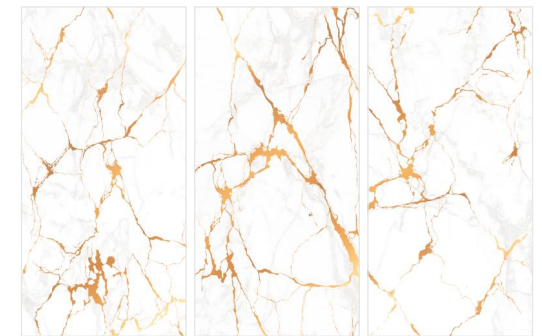

CR-65

Random-4




600x1200mm



CR-66

Random-4


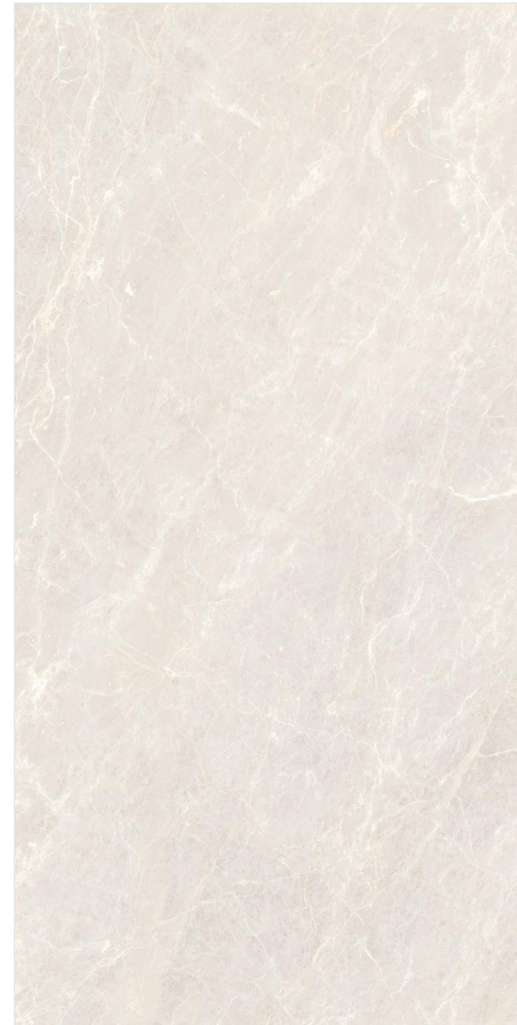


CR-67

Random-4





600x1200mm

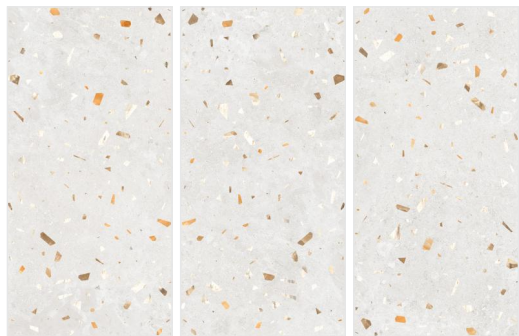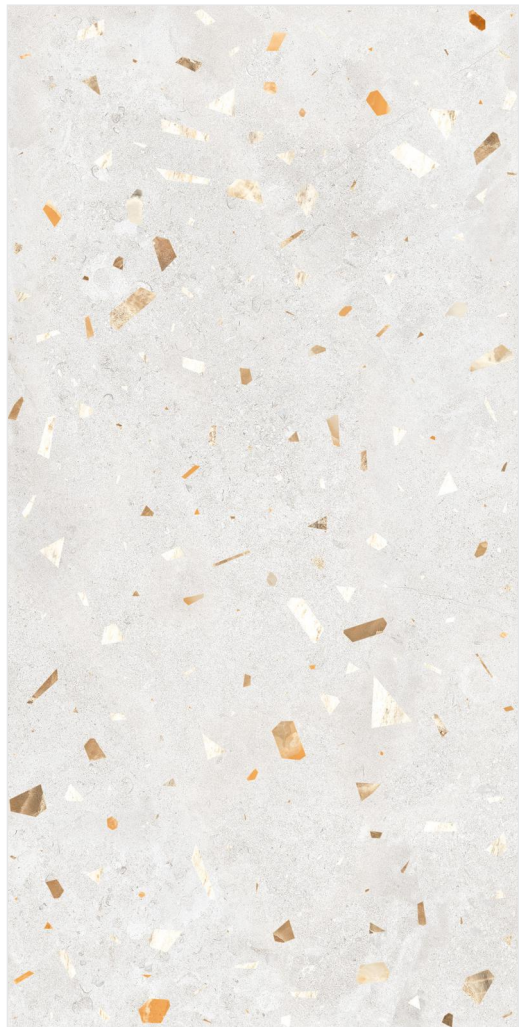


CR-70

Random-4

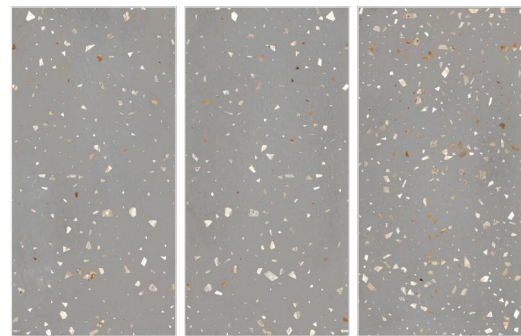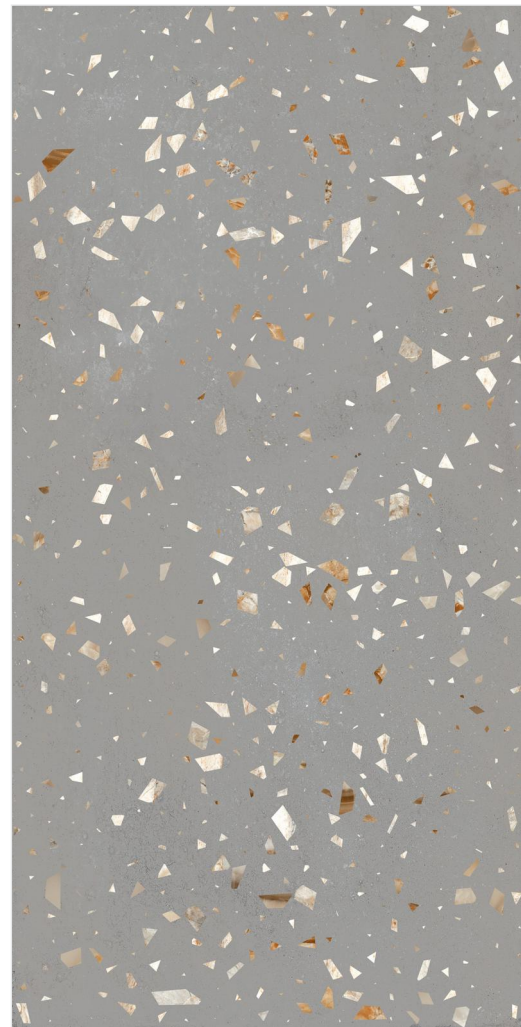


CR-69

Random-4

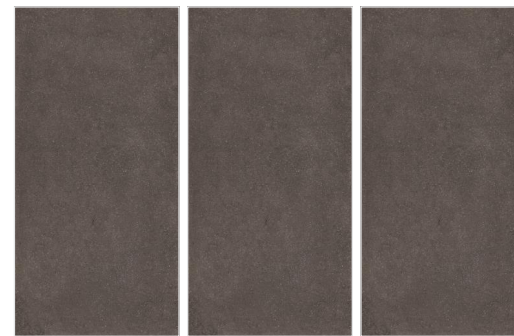

BRUMA BRONZ
(CR-49)

Random-1

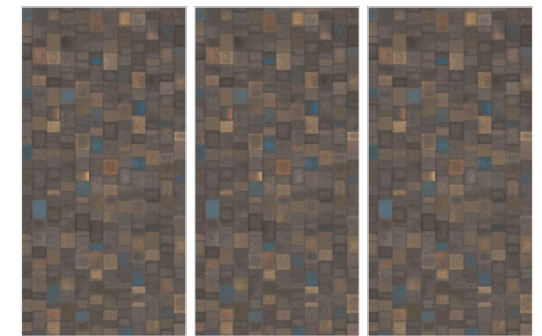

BRUMA BRONZ HL
(CR-49)

Random-1



600x1200mm




LEO BIANCO

Random-4



LEO DARK BROWN

Random-4

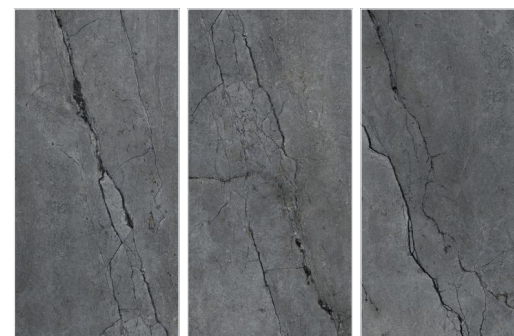

LEO DARK GREY

Random-4



LEO GREY

Random-4



600x1200mm



LEO IVORY

Random-4



LEO LIGHT BROWN

Random-4



LEO MIST

Random-4




LEO ROYAL

Random-4



600x1200mm

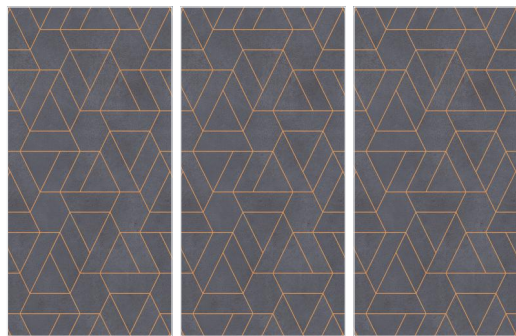

CR-68

Random-1



600x1200mm

TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP Bla	MEAN VALUE PGVT / GVT	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	±0.5 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	GLOSSOMETER
STRUCTURAL PROPERTIES			
Water absorption	< 0.50 %	< 0.05 %	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
Surface abrasion resistance	As per mfg	Min. Class-3	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	EN 101
THERMO HYGROMETRIC PROPERTIES			
Frost resistance	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	SO-10545-14
SAFETY PROPERTIES			
Slip resistance	As per mfg	> 0.40	ISO-10545-17
Fire resistance	As per mfg	Fireproof	N. A.
Lead & Cadmium given off by glazed tiles	As per mfg	Does not yield Pb & Cd	ISO-10545-15

PACKING DETAILS

SIZE	THICKNESS	TILES PER BOX	COVERAGE AREA (Approx)
600X1200MM	9 mm (Approx)	2 Pcs	1.44 Sq. Mtr

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.